


Quote senza tolleranza espresse in mm					Tipo di lav.	Simbologia utilizzata (Secondo UNI 7226)						
Minimo	1	11	51	150								
Massimo	10	50	150									
Sup. lav. macchina	±0.05	±0.1	±0.2	±0.3								
Sup. stampate	±0.1	±0.15	±0.2	±0.2								
Sup. lav. manualmente	±0.2	±0.3	±0.4	±0.5								
Foratura	±0.1	±0.2	±0.3	±0.5								

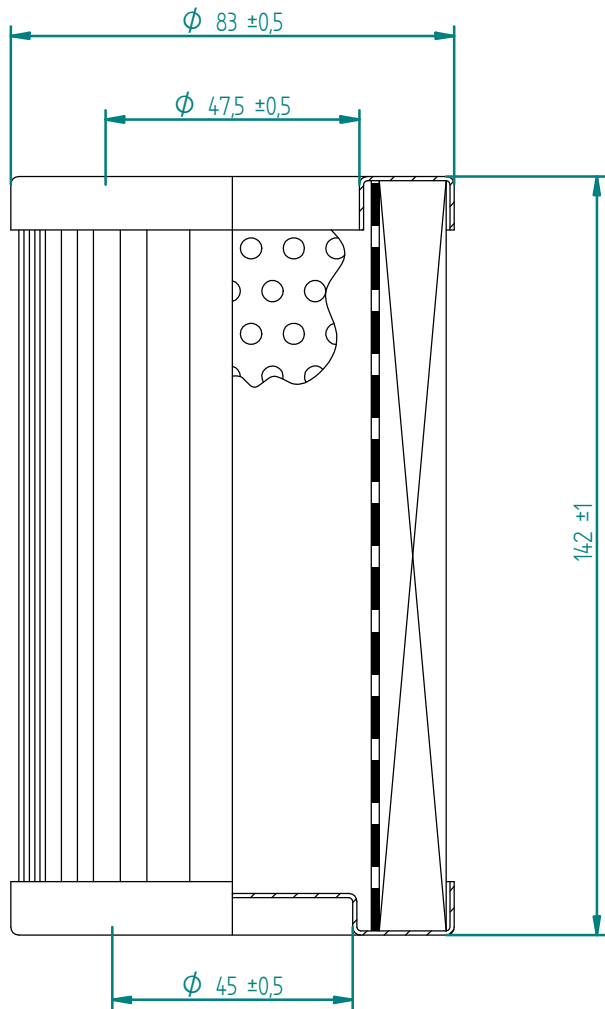

## TECHNICAL DATA

FILTER TYPE:	HYDRAULIC FILTER
MEDIA SURFACE AREA	0.28 m <sup>2</sup>
NOMINAL FLOW RATE	150 L/min.
WORKING TEMPERATURE	-40°C +135°C
FLOW DIRECTION	OUT/IN
MICRO RATING	25 μ
COLLAPSE PRESSURE	20 bar
GASKET MATERIAL	NBR
INNER SUPPORT	Perf.rate 22.5%
FILTER MEDIA	Car.10001
ALL METAL PARTS	Zinc plated
ADHESIVE	Epoxy
QUALITY CONTROL	According to ISO 9001:2015 procedures

The data in this technical card are not binding. In view of continuous product improvement, Edmac Europe reserves the right to make changes without prior notice.

00							
Rev.	Descrizione modifiche			Data	Firma	Approvazione U.T.	
Materiale:	Trattamento:	Sostituisce	Data:	Foglio:	1/1		
		Sostituito da	Data:	Nome file:	8320.dft		
 PART OF YOUR BUSINESS	Disegnatore	Approvazione U.T.	SCALA:		Codice cliente:		
	Data	12.06.13	12.06.13		Disegno:	Codice Particolare:	
					Stampa:		
	Denominazione particolare:						

	Disegnatore	Approvazione PRD.	3004558321
Data	26.07.21		